

Measurement and validation of the cross section in the FLUKA code for the production of ^{63}Zn and ^{65}Zn in Cu targets for low-energy proton accelerators*

QIU Rui (邱睿)^{1,2,3}, LIU Yuan-Yuan (刘圆圆)⁴, LI Wen-Qian (李文茜)^{1,2,3},
PAN Yu-Xi (潘羽晞)^{1,2,3}, WANG Shi-Lian (王世联)⁵, LI Qi (李奇)⁵ and LI Jun-Li (李君利)^{1,2,3,†}

¹Department of Engineering Physics, Tsinghua University, Beijing 100084, China

²Key Laboratory of High Energy Radiation Imaging Fundamental Science, Beijing 100084, China

³Key Laboratory of Particle and Radiation Imaging of Ministry of Education, Beijing 100084, China

⁴Nuclear and Radiation Safety Center, MEP, Beijing 100082, China

⁵CTBT Beijing National Data Centre and Radionuclide Laboratory, Beijing 100085, China

(Received June 30, 2013; accepted in revised form September 25, 2014; published online November 25, 2014)

Induced radioactivity is one of the essential problems in the radiation protection field of proton accelerators. Research on the induced radioactivity of low-energy proton accelerators is highly limited. Given such context, this study investigates the cross section of ^{63}Cu (p, n) ^{63}Zn and ^{65}Cu (p, n) ^{65}Zn in Cu targets at 11 MeV proton accelerators through an activation experiment. The uncertainties of the results are analyzed in detail. Results show that the cross section of the reaction of ^{65}Cu (p, n) ^{65}Zn in the experiment is only 1.36% lower than that of the FLUKA simulation, whereas the reaction of ^{63}Cu (p, n) ^{63}Zn in the experiment is 25.4% higher than that of the FLUKA simulation. Given that the benchmark for the FLUKA code of low-energy proton accelerators is very limited, this study provides a reference in this field.

Keywords: Activation analysis experiment, Cross section measurement, Induced radioactivity, FLUKA, Copper target

DOI: [10.13538/j.1001-8042/nst.25.S010202](https://doi.org/10.13538/j.1001-8042/nst.25.S010202)

I. INTRODUCTION

The radiation protection of proton accelerators is a critical issue to the radiation safety of both the work personnel and the public [1–3]. One particular aspect of proton accelerators is the induced radioactivity, given that the intense primary proton beams, secondary neutron beams, and scattered particles can activate the materials of the accelerator components [4–8]. From the perspective of radiation safety, quantitatively evaluating the radioactivity induced by different materials is important. To estimate the induced radioactivity, a Monte Carlo simulation or some method of theoretical analysis[9] may be adopted.

FLUKA [10, 11] is a general-purpose Monte Carlo code that calculates the particle transport and their interactions with matter; it is applicable in an extended range of applications from proton and electron accelerator shielding to target design, calorimetry, activation, dosimetry, detector design, accelerator-driven systems, cosmic rays, neutrino physics, radiotherapy, and so on. FLUKA is widely used in estimating the induced radioactivity of the components of accelerators in the air of the tunnel or cooling water for the radiation protection of the personnel. Some benchmark experiments have been conducted to verify the accuracy of FLUKA in calculating the induced radioactivity of high-energy proton and electron accelerators [12–14]. However, studies that compare the FLUKA simulated results and experimental data of low-energy proton accelerators remain scarce.

Studying the induced radioactivity of low-energy proton accelerators is important, given the wide range of their applications. For example, medical proton accelerators that produce radioactive medicine have typical energy rates between 10 MeV and 18 MeV.

In the present study, the cross section of ^{63}Cu (p, n) ^{63}Zn and ^{65}Cu (p, n) ^{65}Zn in a Cu target at an 11 MeV proton accelerator was investigated through an activation experiment and a Monte Carlo simulation. Cu was chosen because it is a frequently used material in the structure of proton accelerators and is a relatively pure material compared with others. ^{63}Zn and ^{65}Zn , which are produced by the ^{63}Cu (p, n) ^{63}Zn and ^{65}Cu (p, n) ^{65}Zn reactions, respectively, were also investigated because they are two most important isotopes generated in the Cu target.

The measured results and the corresponding data simulated using FLUKA were compared to verify the accuracy of FLUKA at a low-energy range for proton accelerators.

II. METHODS

The activation analysis method, which originated in the 1930s, is widely used in many fields[15–20]. The method is described in the subsequent sections.

Suppose a thin target sample with element N_1 is placed in the homogeneous flux of a proton beam. The incidence protons result in nuclear reaction $N_1(p,n)N_2$. The cross section σ is expressed as

$$\sigma = \frac{\lambda N_{\text{irr}}}{I n_d (1 - e^{-\lambda t_{\text{irr}}})}, \quad (1)$$

where λ is the decay constant of the activated nuclei; I is the current of the incident beam (i.e., incident particle counts in

* Supported by the National Natural Science Foundation of China (Nos. 11105081, 11275110 and 11375103) and the National Energy Application Project For Research and Demonstration (No. 20131660315).

† Corresponding author, lijunli@tsinghua.edu.cn

unit time s^{-1}); n_d is the nuclei number of the target with thickness d , cm^{-2} , and n_d is given by

$$n_d = \frac{d\rho}{m} \cdot y, \quad (2)$$

where ρ is the target density in g/cm^3 ; m is the atomic mass of the target material, and y is the quantity of the element.

In the experiment, N_{irr} is derived using the following formula:

$$N_{irr} = N_{decay}/e^{-t_1}(1 - e^{-t_{decay}}), \quad (3)$$

where t_1 is the cooling time after the irradiation ends, t_{decay} is the time during the activity measurement, and N_{decay} is the number of decays measured in the radioactive nuclei.

III. EXPERIMENT

A. Target Properties

The Cu targets used in the experiment had the shape of a disc with a diameter of 1.7 cm and thickness of 30 μm , according to the precision requirements of the national standard. The major properties of the targets are listed in Table 1. Three Cu targets were used: one for the pre-test to identify the test procedures well and two for the cross section measurements, labeled as samples 1 and 2.

Table 1. Properties of the target used in experiment

Isotope	Atomic percent(%)	Daughter	Half-life
^{63}Cu	69.345	^{63}Zn	38.47 min
^{65}Cu	30.365	^{65}Zn	244.2 days

B. Irradiation of the targets

The targets were irradiated using RDS 111-type proton cyclotron. The proton energy was 11 MeV, and the diameter of the beam spot was less than 2 mm. The range of the 11 MeV proton in copper was approximately 386.5 μm , which was much larger than the target thickness. The beam intensity was easy to adjust and measure using a Faraday cup, and was set as several μA during the experiment. The irradiation time for each sample was 4 s and was controlled by manually operating the control software of the accelerator.

Figure 1 shows that the beam was defined by a collimator. The incident beam intensity was measured with a Faraday cup mounted directly after the target. The stability of the beam intensity was monitored with a current integrator. The corresponding irradiation intensities for samples 1 and 2 were 2.66 and 3.02 μA , respectively.

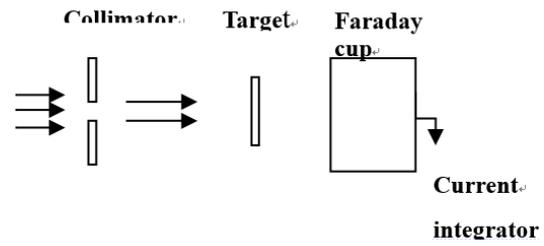


Fig. 1. Schematic of the activation experiment.

C. Measurement of the induced radioactivity

After irradiation, the activated samples were placed in a separate low-background counting area and were measured using a hyperpure germanium detector. The energy resolution (FWHM) of this GEM70-S gamma spectrum detector was 1.90 keV@1332.5 keV. The energy spectrum data were obtained through 8192 channels of a digital spectrometer (DSPEC Plus). The entire system was calibrated using the virtual calibration software Gamma Vision 32 just before the measurement. The detection efficiencies for different photon energies are shown in Fig. 2.

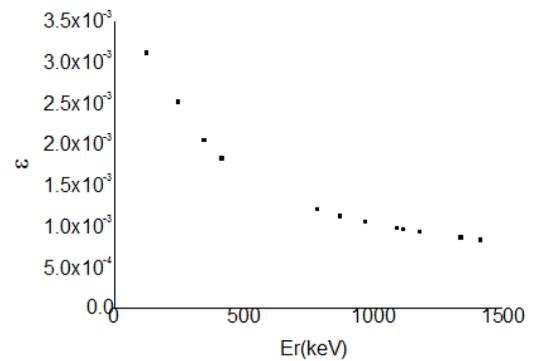


Fig. 2. Detection efficiencies for different photon energy.

Given the statistical error requirement for the energy spectrum measurement, approximately 1.5 h was taken to measure the decay spectrum of ^{63}Zn , and approximately 24 h for that of ^{65}Zn . Another reason for this difference is because the half-life of ^{63}Zn is shorter (38.5 minutes) than ^{65}Zn (243.7 days). The activities of ^{63}Zn and ^{65}Zn at the stoppage time were obtained from the product of and N_{irr} , where N_{irr} is calculated using Eq. 3.

Table 2 lists the counting results, detection efficiency, and activities of ^{63}Zn and ^{65}Zn at the stoppage time and their corresponding errors for samples 1 and 2. The errors mainly originated from the statistical errors in counting.

IV. MONTE CARLO SIMULATION WITH FLUKA

The cross section data in FLUKA were partially obtained from experimental base of the American National Nuclear

Table 2. Activities at stopping time

		Photopeak (keV)	Counts	Efficiency (10^{-3})	Activity (Bq)	Errors (%)
Sample 1	^{63}Zn	669.62	12916	1.33	1.38×10^6	2.93
	^{65}Zn	1115.55	17731	4.51	1.14×10^2	2.82
Sample 2	^{63}Zn	669.62	47398	1.33	1.50×10^6	2.62
	^{65}Zn	1115.55	15410	3.64	1.23×10^2	2.86

Data Center[10, 11]. The proton and neutron inelastic cross sections between 10 and 200 MeV were updated by fitting them to the experimental data. An accurate treatment of the cross-section energy dependence of all the charged particles independent of the step size was introduced at that stage through the fictitious- σ method. The present treatment for the hadron-nucleus cross section was based on a novel approach that combined experimental data, data-driven theoretical approaches, PDG fits, and phase-shift analysis when available.

To compare the measured cross section results and the corresponding data used in the FLUKA code, a detailed Monte Carlo simulation of the experiment was also conducted. The parameters in the simulation were the same as those in the experiment, such as beam energy, geometry, irradiation profile, and so on. The simulation was based on a detailed description of the experimental setup. The samples were defined using their actual size.

The full hadronic cascade was simulated in the experimental setup. Neutrons were transported down to thermal energies, and a threshold of 1 keV was applied to all other hadrons. A number of physical settings were activated; these settings included the request of PEANUT model at all energies, the treatment of coalescence, and the evaporation of heavy fragments. The activities of the radionuclides, ^{65}Zn and ^{63}Zn in the samples, at a certain cooling time were calculated using FLUKA. The cross sections of ^{65}Cu (p, n) ^{65}Zn and ^{63}Cu (p, n) ^{63}Zn used by FLUKA were then deduced using Eq. (1). The error of the cross section was mainly caused by the statistical error in the calculation of the activity, which was 0.1% and 0.2% for ^{65}Zn and ^{63}Zn , respectively. The relative uncertainties of the cross sections of ^{65}Cu (p, n) ^{65}Zn and ^{63}Cu (p, n) ^{63}Zn from the simulation were 0.1% and 0.2%, respectively.

V. RESULTS AND DISCUSSION

A. Uncertainty analysis of the cross section

To analyze the discrepancy between the measured cross section and that from the FLUKA simulation, a detailed uncertainty analysis was conducted on the measurement results. The uncertainty of the cross section data from the FLUKA simulation was mainly due to the statistical error in the calculation.

Equation 1 indicates that the uncertainty in the results originated from the errors in the quantities of the nuclei number of the target (n_d), activity at stoppage time (A_{irr}), beam intensity (I), and irradiation time (t_{irr}). The formula is given

as

$$\begin{aligned} \sigma_{\sigma} &= \sigma \left[\left(\frac{\sigma_{A_{\text{irr}}}}{A_{\text{irr}}} \right)^2 + \left(\frac{\sigma_{n_d}}{n_d} \right)^2 + \left(\frac{\sigma_I}{I} \right)^2 \right. \\ &\quad \left. + \left(\frac{\partial \left[\frac{A_{\text{irr}}}{n_d I (1 - e^{-\lambda t_{\text{irr}}})} \right]}{\partial t_{\text{irr}}} \right)^2 \frac{\sigma_{t_{\text{irr}}}^2}{\sigma^2} \right]^{\frac{1}{2}} \quad (4) \\ &= \sigma \left[\left(\frac{\sigma_{A_{\text{irr}}}}{A_{\text{irr}}} \right)^2 + \left(\frac{\sigma_{n_d}}{n_d} \right)^2 + \left(\frac{\sigma_I}{I} \right)^2 + \left(\frac{\lambda e^{-\lambda t_{\text{irr}}}}{1 - e^{-\lambda t_{\text{irr}}}} \right)^2 \sigma_{t_{\text{irr}}}^2 \right]^{\frac{1}{2}}, \end{aligned}$$

where σ is the cross section, and σ_{σ} , $\sigma_{A_{\text{irr}}}$, σ_{n_d} , σ_I , and $\sigma_{t_{\text{irr}}}$ are the standard deviations of σ , A_{irr} , n_d , I , and t_{irr} , respectively.

The uncertainties can be classified as follows:

a) Errors in the target manufacture These errors include the thickness, purity, and inhomogeneity of the thin copper foil. According to reference[21, 22], the difference between the quantity of ^{63}Cu and that of ^{65}Cu in natural Cu at different places is small and generally less than 0.2%. Therefore, the influence of isotope abundance can be neglected. Considering that the machining techniques of creating a 30 μm thick Cu target was very mature, the errors attributed to the purity and inhomogeneity of the thin copper foil in the manufacture were negligible compared with the errors of the target thickness.

Therefore, the uncertainty in the target manufacture originated mainly from the uncertainty of the thickness. According to the information provided by the manufacturer, the standard deviation of the thickness was 0.003 mm. The thickness of the Cu foils was 0.03 mm; hence,

$$\frac{\sigma_{n_d}}{n_d} \approx \frac{\sigma_d}{d} \approx 10\%, \quad (5)$$

b) Uncertainties in the irradiation period These uncertainties include errors of the proton beam energy, irradiation time, and beam intensity. The beam energy of RDS 111-type proton cyclotron was 11 MeV, and the uncertainty of the energy was found to be negligible according to the measurement results provided by the accelerator control department. As previously mentioned, the irradiation time for each sample was 4 s, and the error was estimated to be within 0.5 s. The error of the beam intensity was estimated to be 0.01 μA .

c) Uncertainties in the measurement of the induced radioactivity These uncertainties include errors of detection efficiency, counting time, and statistical errors in counting. The virtual calibration software Gamma Vision 32 description for the GEM70-S gamma spectrum detector shows that the uncertainty of the detection efficiency was lower than 2.5%. The

uncertainty of the counting time was very small and negligible. The counting results were usually higher than 10^4 (i.e., the errors of the counting are less than 3% with a confidence interval of 99.7%). According to Eq. 2, the relative uncertainty of N_{irr} at the confidence interval of 99.7% is given by

$$R_{N_{\text{irr}}} = R_{N_{\text{decay}}} = \left[\frac{3}{N_c} + R_{\text{eta}}^2 \right]^{1/2} = \left[\frac{3}{N_c} + 2.5\%^2 \right]^{1/2}, \quad (6)$$

where the uncertainty of the decay constant and counting time are neglected.

The activity at the stoppage time of irradiation A_{irr} can be derived using the following formula:

$$A_{\text{irr}} = \lambda N_{\text{irr}}. \quad (7)$$

The relative uncertainty of A_{irr} can then be calculated by

$$R_{A_{\text{irr}}} = R_{N_{\text{irr}}} = R_{N_{\text{decay}}} = \left[\frac{3}{N_c} + R_{\text{eta}}^2 \right]^{1/2} = \left[\frac{3}{N_c} + 2.5\%^2 \right]^{1/2}. \quad (8)$$

The results for the relative uncertainty of A_{irr} are shown in Table 2. The uncertainties of the measured cross section were obtained from the preceding discussion. The results are listed in Table 3.

Table 3. Reaction cross sections of ^{63}Cu (p,n) ^{63}Zn and ^{65}Cu (p,n) ^{65}Zn (mb)

	$^{63}\text{Cu}(\text{p,n})^{63}\text{Zn}$	$^{65}\text{Cu}(\text{p,n})^{65}\text{Zn}$
Sample 1	391±63	674±108
Sample 2	375±60	640±102
Average	383±4	657±72
FLUKA	302±5	658±15

B. Comparison of cross sections

Table 3 shows a summary comparison of the experimental results, FLUKA simulation results, and some other published data based on different calculation models[22–25] of the cross sections of ^{63}Cu (p, n) ^{63}Zn and ^{65}Cu (p, n) ^{65}Zn reactions. The uncertainties of the results were discussed in detail in the previous sections.

Both the average cross sections and FLUKA simulation are within the range of the various results of several references, where they are obtained from theoretical calculations. For the reaction of ^{65}Cu (p, n) ^{65}Zn , the difference between the cross sections from the experiment and FLUKA simulation was only 1.36%. However, for the reaction ^{63}Cu (p, n) ^{63}Zn , the cross section measured in this work was 25.41% higher than that in the FLUKA simulation.

VI. CONCLUSIONS

Induced radioactivity is one of the essential problems in the radiation protection of proton accelerators. The accuracy of estimating induced radioactivity relies on the precision of the cross section data. Therefore, verifying the related cross section data through simulation and experiment is important, given that the data for low-energy protons are limited. In this work, the cross sections of the reactions of ^{65}Cu (p, n) ^{65}Zn and ^{63}Cu (p, n) ^{63}Zn were studied using both the activation analysis method with irradiation experiment and the detailed Monte Carlo simulation with the FLUKA code. The uncertainties of the results were also analyzed in detail.

The cross sections obtained in this work through both the experiment and simulation are within the range of results of published papers, which were mainly based on theoretical calculations. A slight difference of 1.36% was observed between the cross section of the reaction of ^{65}Cu (p,n) ^{65}Zn from the experiment and that from FLUKA simulation. However, the data obtained through the experiment was 25.4% higher than that of the FLUKA simulation. Given that the benchmark for the FLUKA code at low-energy proton accelerators is limited, the work in this paper provides a reference in this field.

-
- [1] Baccaro S, Busatto G, Citterio M, *et al.* Microelectron Reliability, 2012, **52**: 65–2470.
 - [2] Wang S, An Y W, Fang S X, *et al.* Sci Chin Phys Mech Astron, 2011, **54**: S239–S244.
 - [3] Silari M. Radiat Prot Dosim, 2011, **146**: 440–450.
 - [4] Dinter H, Tesch K, Dworak D. Nucl Instrum Methods Phys Research A, 1996a, **368**: 265–272.
 - [5] Dinter H, Tesch K, Dworak D. Nucl Instrum Methods Phys Research A, 1996b, **368**: 273–277.
 - [6] Agosteo S, Magistris M, Mereghetti A, *et al.* Nucl Instrum Methods Phys Research B, 2007, **265**: 581–598.
 - [7] Agosteo S, Magistris M, Mereghetti A, *et al.* Nucl Instrum Methods Phys Research B, 2008a, **266**: 3406–3416.
 - [8] Koprivnikar I and Schachinger E. Nucl Instrum Methods Phys Research A, 2002, **487**: 571–584.
 - [9] Cossairt J. Proc. of the Health Physics Society 2008: Professional Development School - Topics in Accelerator Health Physics, 2008, Oakland CA, USA.
 - [10] Battistoni G, Muraro S, Sala P R, *et al.* AIP Conference Proceeding, 2007, **896**: 31–49.
 - [11] Ferrari A, Sala P R, Fasso A, Ranft J. CERN-2005-10, INFN/TC_05/11, SLAC-R-773.
 - [12] Brugger M, Khater H, Mayer S, *et al.* Radiat Prot Dosim, 2005, **116**: 6–11.
 - [13] Brugger M, Khater H, Mayer S, *et al.* Radiat Prot Dosim, 2005, **116**: 12–15.

- [14] Brugger M, Ferrari A, Roesler S, *et al.* Nucl Instrum Methods Phys Research A, 2006, **562**: 814–818.
- [15] Boyd G E. Nucleon Analyt Chem Symp, 1949, **21**: 335.
- [16] Lyon W S. Guide to Activation Analysis. Van Nostrand. New York, 1964.
- [17] Aliev. Handbook of nuclear data for neutron activation analysis. Israel Program for Scientific Translations ,1970.
- [18] Soete D D, Gijbels R, Hoste J. Neutron activation analysis, Wiley-Interscience. New York, 1972.
- [19] Ozkan N, Murphy A, R.N.Boyd. Nucl Phys A, 2002, **710**: 469–485.
- [20] Guray R T, Ozkan N, Yalcm C. Phys Rev C, 2009, **80**: 035804(1–7).
- [21] Doohwan K, Lee Y, Chang J, J the Korean Nucl Soc, 1999, **31**: 595–607.
- [22] Han Y, Zhang Z, Chang J, *et al.* Nucl Instrum Methods Phys Research B, 2005, **239**: 314–330.
- [23] Kormali S M, Swindle D L, Schweikert E A. J Radioanalyt Chem, 1976, **31**: 437–450.
- [24] Doohwan K, Lee Y, Chang J. J the Korean Nucl Soc, 1999, **31**: 595–607.
- [25] Aydin A, Sarer B, Tel E. Appl Radiat Isot, 2007, **65**: 365–370.